

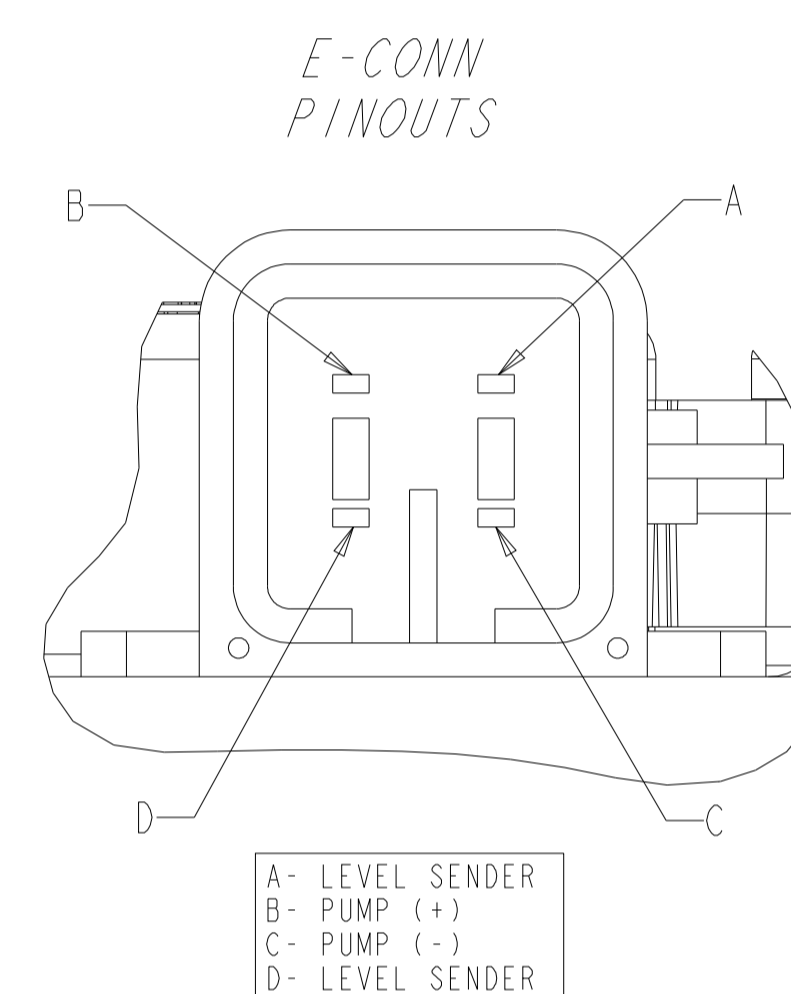


REVISIONS						
ZONE	LTR	DESCRIPTION	CHANGE No	DATE	BY	APPR'D
AA		RELEASED FOR PRODUCTION	DR55670	11JAN16	JAK	BLM

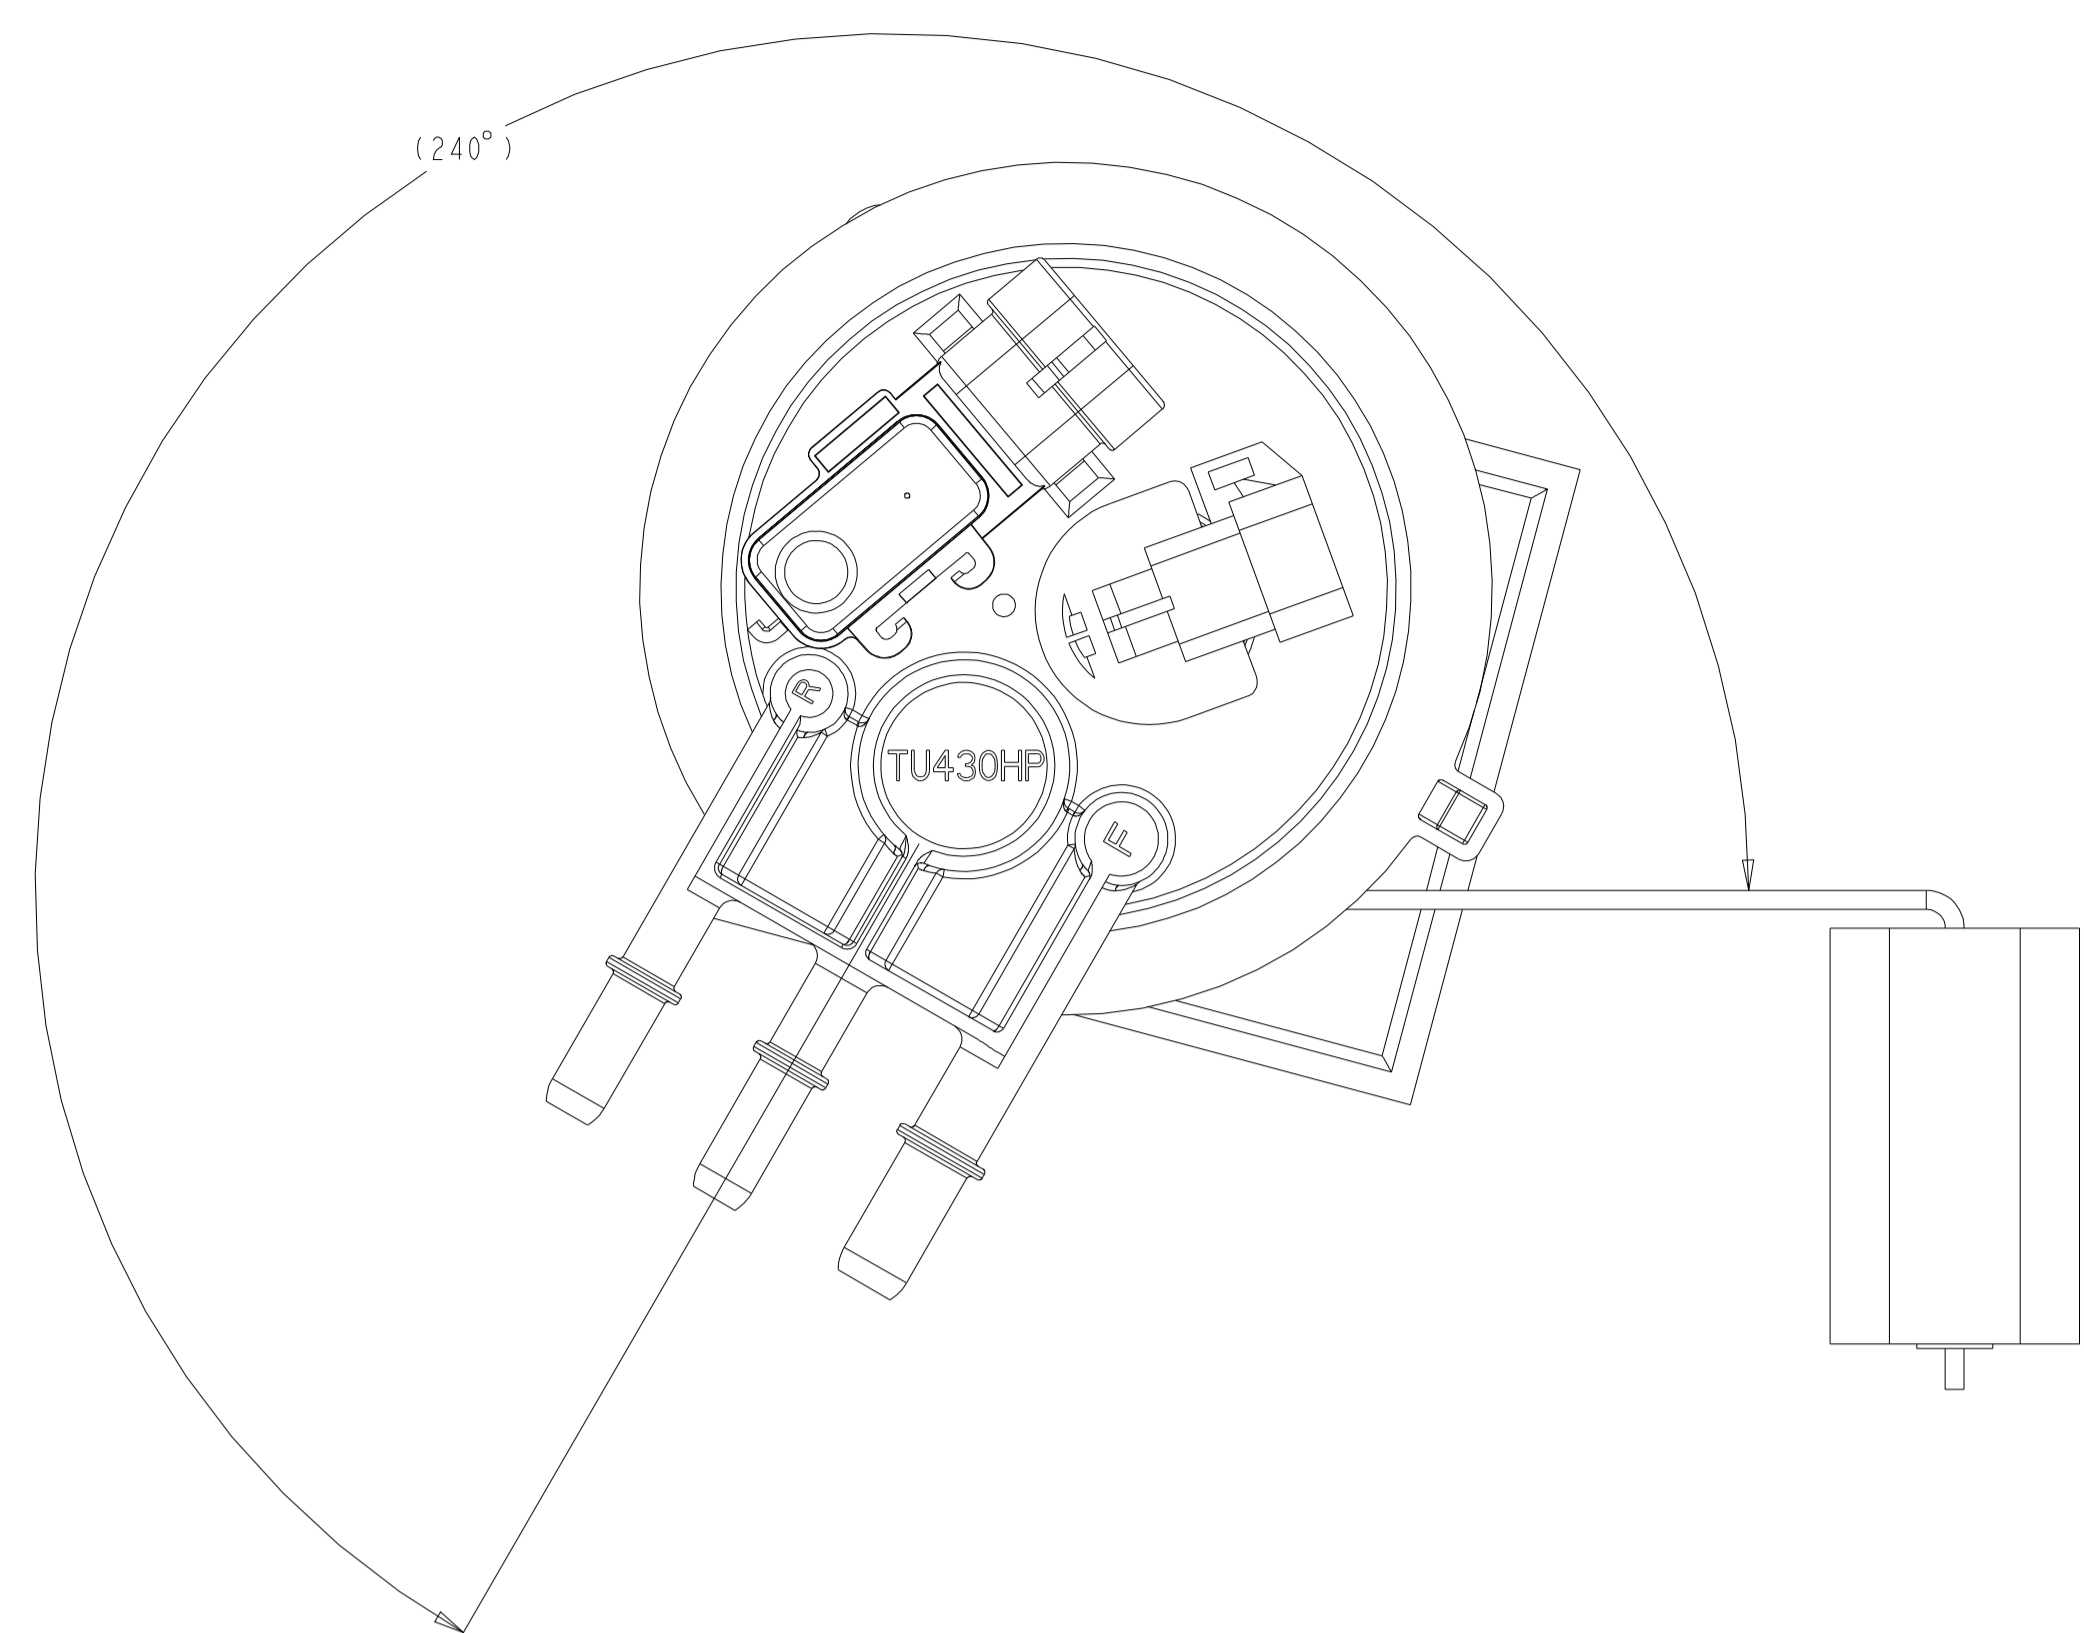

SCALE 3:1

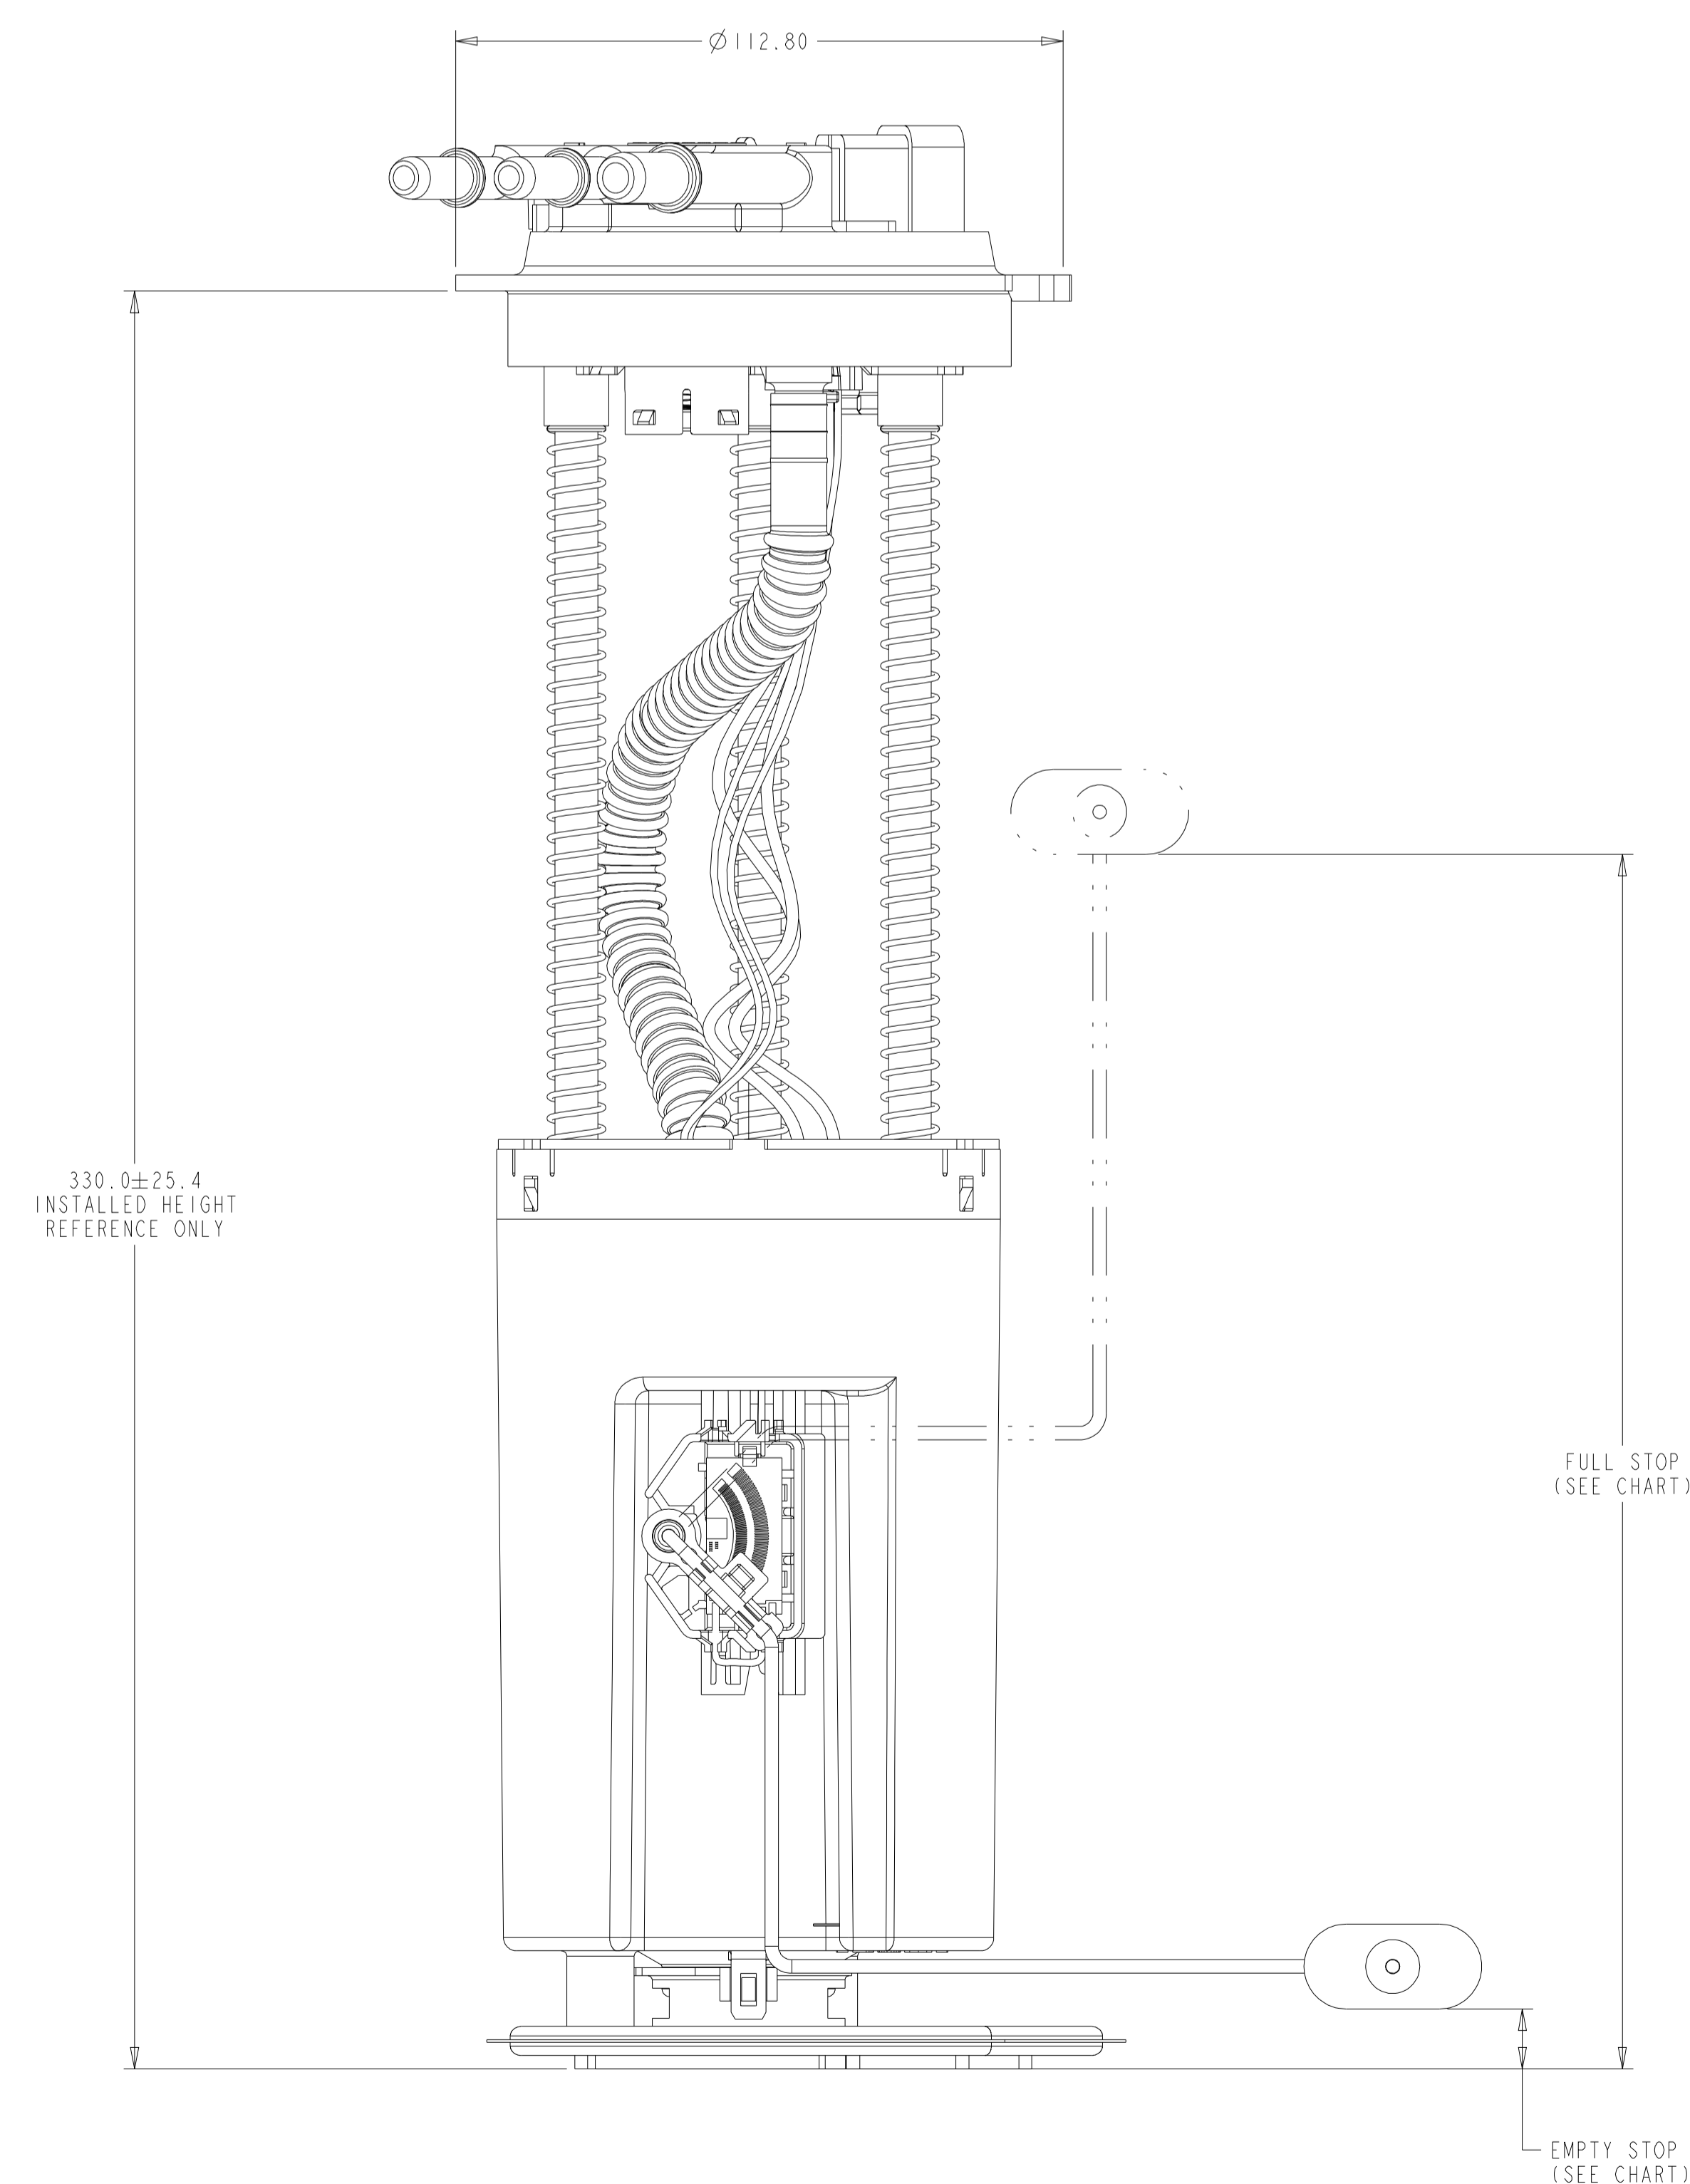

LEVEL SENDER		
POINT	HEIGHT	OHMS
FULL STOP	224.0	250.0±10
EMPTY STOP	10.5	40.0±3

NOTES:

- CHANGE IN DESIGN, COMPOSITION, LOCATION OR PROCESSING FROM THE PART PREVIOUSLY APPROVED FOR PRODUCTION REQUIRES PRIOR APPROVAL BY T1 AUTOMOTIVE
- PUMP USED: F20000178
- MODULE TO BE PACKAGED USING COMPONENTS NOTED ON BOM SO THAT CONTAMINATION FROM FOREIGN MATERIAL IS PREVENTED:
 - PLUG PROTECTORS ON PORTS
 - POLYBAG

KEY PRODUCT CHARACTERISTICS		
✓	SAFETY CHARACTERISTIC	AS PER REQUIREMENTS
∅	CRITICAL CHARACTERISTIC	AS PER REQUIREMENTS
⊕	HIGH IMPACT CHARACTERISTIC	AS PER REQUIREMENTS

ENGINEER:	B.MIDDLETON	11JAN16	MATERIAL/SPECIFICATION:	N/A
DESIGNER:	J.KOUTRAS	11JAN16	CAD SYSTEM:	PROVE
SCALE:	1:1	SHEET NO.:	1	OF 1
REFERENCE TERNARY:	000115955/AA	AS PER REQUIREMENTS:	AR0042273/AA	
REFERENCE TERNARY:		AS PER REQUIREMENTS:	AR0042271/AA	

TOP LEVEL ASSEMBLY

SIZE: A0

MARKING NUMBER: TU430HP

METRIC
ALL DIMENSIONS ARE IN MILLIMETERS

DO NOT SCALE

DECIMAL TOLERANCES UNLESS OTHERWISE SPECIFIED
ONE PLACE ±0.25 TWO PLACE ±0.13 ANGLES ±1°

THIRD ANGLE PROJECTION

DIMENSIONS IN ACCORDANCE WITH ASME Y14.5 - 2009

630 COLUMBIA ST.
CARO, MI 48723
+1 989.673.7727

L
K
J
I
H
G
F
E
D
C
B
A

16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1